

GBJ601 THRU GBJ610

SINGLE-PHASE BRIDGE RECTIFIER GLASS PASSIVATED BRIDGE RECTIFIERS
 REVERSE VOLTAGE 100 to 1000 Volts FORWARD CURRENT 6.0 Ampere


FEATURES

- ◆ Rating to 1000V PRV.
- ◆ Ideal for printed circuit board.
- ◆ Low forward voltage drop, high current capability.
- ◆ Reliable low cost construction utilizing molded plastic technique results in inexpensive product.
- ◆ The plastic material has UL flammability classification 94V-0.
- ◆ Electrically isolated base-1500 Volts

Mechanical Data

- ◆ Polarity: Symbols molded on body.
- ◆ Weight: 0.26 ounces, 7.0 grams.
- ◆ Mounting position: Any.

GBJ

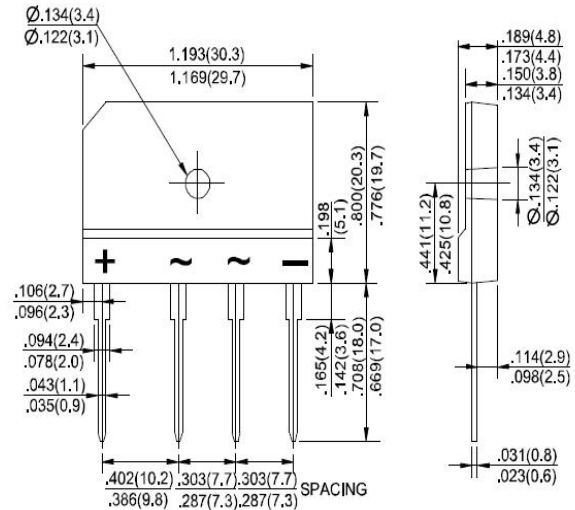

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

PARAMETER	SYMBOL	GBJ601	GBJ602	GBJ604	GBJ606	GBJ608	GBJ610	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	V
Maximum Average Forward (with heatsink Note 2) Rectified Current @ $T_C=110^\circ\text{C}$ (without heatsink)	$I_{(AV)}$	6.0						A
		2.8						
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	180						A
Maximum forward Voltage at 3.0A DC	V_F	1.0						V
Maximum DC Reverse Current @ $T_J=25^\circ\text{C}$ at Rated DC Blocking voltage @ $T_J=125^\circ\text{C}$	I_R	5.0						μA
		500						
I^2t Rating for fusing ($t < 8.3\text{ms}$)	I^2t	120						A^2S
Typical Junction Capacitance per element (Note 1)	C_J	55						pF
Typical Thermal Resistance (Note 2)	$R_{\theta JC}$	2.5						$^\circ\text{C}/\text{W}$
Operating Temperature Range	T_J	-55 to +150						$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150						$^\circ\text{C}$






Note: 1. Measured at 1.0M Hz and applied reversed voltage of 4.0 VDC.

2. Device mounted on 75mm x 75mm x 1.6mm Cu Plate Heatsink.

GBJ601 THRU GBJ610

SINGLE-PHASE BRIDGE RECTIFIER GLASS PASSIVATED BRIDGE RECTIFIER
 REVERSE VOLTAGE 100 to 1000 Volts FORWARD CURRENT 6.0 Ampere

RATING AND CHARACTERISTIC CURVES GBJ601 THRU GBJ610

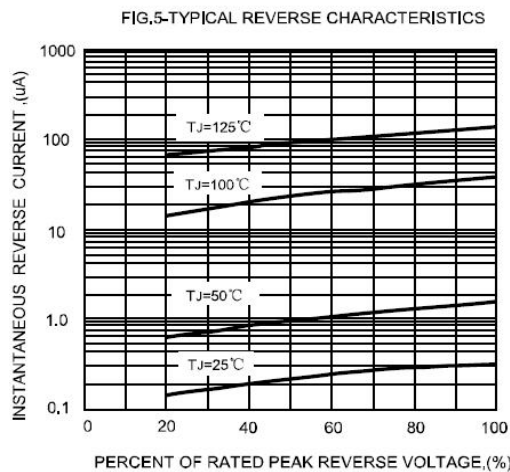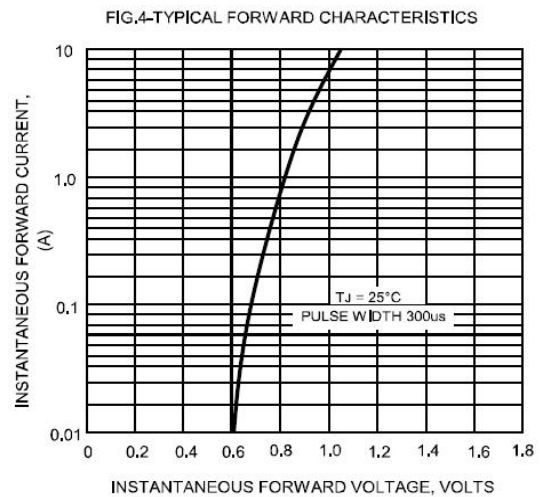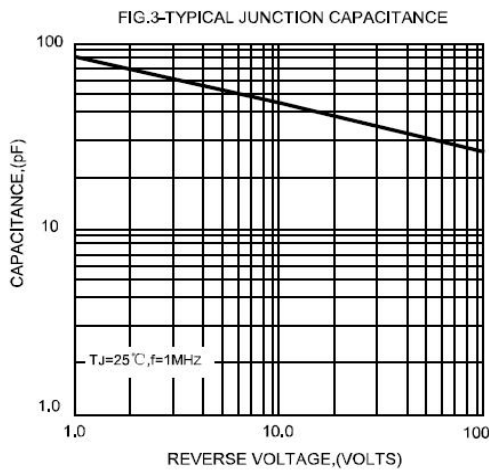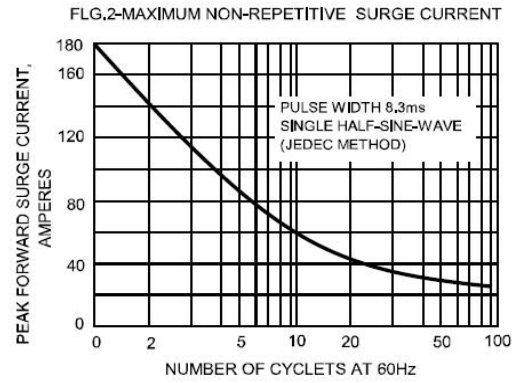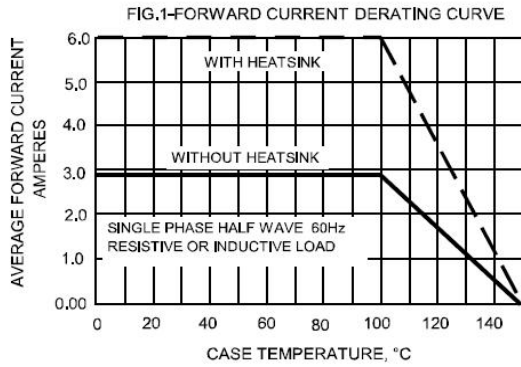

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.