


# TACT SWITCH

Suntan®

TSS-TD-1529

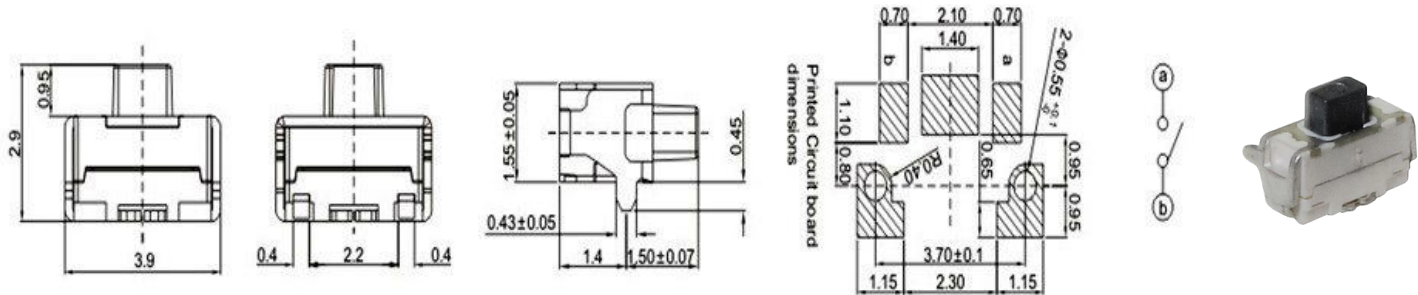

General Tolerance:  $\pm 0.2\text{mm}$

MODEL NO	H (mm)	Tape & Reel Option	CODE	OPERATING FORCE (gf)
TSS-TD-1529	2.9	Yes	F	230±30

## SPECIFICATIONS

1. RATING: DC 12V / 50mA
2. TRAVEL:  $0.15 \pm 0.05\text{mm}$
3. CONTACT RESISTANCE:  $\leq 50\text{m}\Omega$
4. LIFE: More than 100,000 times
5. INSULATION RESISTANCE:  $\geq 100\text{M}\Omega$
6. VOLTAGE PROOF: 250V AC / 1min

Note: Specification are subject to change without notice. For more detail and update, please visit our website.

Suntan® Technology Company Limited Website: [www.suntan.com.hk](http://www.suntan.com.hk) Email: [info@suntan.com.hk](mailto:info@suntan.com.hk) Tel: (852) 8202 8782 Fax: (852) 8208 6246