

High Voltage Metallized Polypropylene Film Capacitor


Suntan®

B O X - T Y P E

TS09B


FEATURES

- Metallized structure, widely used in high voltage, high frequency and pulse circuit
- Low loss and small inherent temperature rise
- Negative temperature coefficient of capacitance
- Excellent active and passive flame resistant abilities

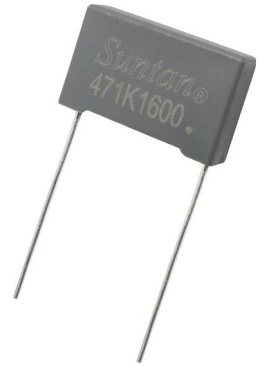

SPECIFICATIONS	
Reference Standard	GB14579 (IEC 60384-17)
Climatic Category	40/105/56
Rated Temperature	85°C for V _R (DC) 75°C for V _R (AC)
Operating Temperature Range	-40°C ~ +105°C (+85°C to +105°C decreasing factor 1.25% per °C for VR DC)
Rated Voltage	1000V, 1400/1600V, 2000V
Capacitance Range	0.00022μF ~ 0.22μF
Capacitance Tolerance	±2%(G), ±3%(E), ±5%(J), ±10%(K), ±20%(M)
Voltage Proof	1.6U _R (5s)
Dissipation Factor	≤0.001, (20°C, 1kHz)
Insulation Resistance	$\geq 50\ 000\ \Omega$, C _R ≤ 0.33μF $\geq 15\ 000\ s$, C _R > 0.33μF (20°C, 100V, 1min)

Outline Drawing

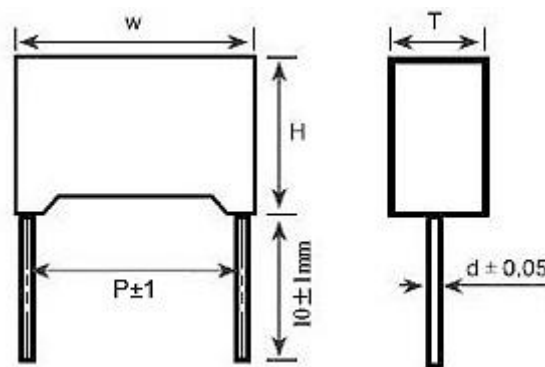

Dimensions (mm)

Lead Pitch: P	≤10	>10
Lead Wire Dia.: d ± 0.05	0.6	0.8
Dimension Tolerance: W,H,T	W+0.5/-0.7, H±0.5, T±0.5	

High Voltage Metallized Polypropylene Film Capacitor

Suntan®

B O X - T Y P E

TS09B

(μF)	1000VDC / 1250VDC (600VAC)				1400VDC / 1600VDC (650VAC)				2000VDC (700VAC)			
	P	W	H	T	P	W	H	T	P	W	H	T
0.00022	10	13	11	5	10	13	11	5	15	18	11	5
0.00027	10	13	11	5	10	13	11	5	15	18	11	5
0.00033	10	13	11	5	15	18	11	5	15	18	11	5
					10	13	11	5				
0.00039	10	13	11	5	10	13	11	5	15	18	11	5
0.00047	10	13	11	5	10	13	11	5	15	18	11	5
0.00056	10	13	11	5	10	13	11	5	15	18	11	5
0.00068	10	13	11	5	10	13	11	5	15	18	11	5
					15	18	11	5				
0.00075	10	13	11	5	10	13	11	5	15	18	11	5
0.00082	10	13	11	5	10	13	11	5	15	18	11	5
					15	18	11	5				
0.001	15	18	11	5	15	18	11	5	15	18	11	5
	10	13	11	5	10	13	11	5	22.5	26.5	15	6
0.0012	15	18	12	6	15	18	12	6	15	18	12	6
	10	13	11	5	10	13	11	5				
0.0015	15	18	12	6	15	18	12	6	15	18	12	6
	10	13	11	5	10	13	11	5				
0.0018	15	18	11	5	15	18	11	5	15	18	12	6
	10	13	11	5	10	13	12	6				
0.0022	15	18	12	6	15	18	12	6	15	18	12	6
	10	13	11	5	10	13	12	6				
0.0027	15	18	13.5	7.5	15	18	13.5	7.5	15	18	14.5	8.4
	10	13	11	5	10	13	12	6				
0.0033	15	18	13.5	7.5	15	18	13.5	7.5	15	18	14.5	8.4
	10	13	11	5	10	13	12	6				
0.0039	10	13	11	5	15	18	14.5	8.5	15	18	14.5	8.5
	15	18	14.5	8.5					22.5	26.5	15	6
0.0047	10	13	11	5	15	18	14.5	8.5	15	18	15.5	9.5
	15	18	14.5	8.5					22.5	26.5	15	6
0.0056	10	13	11	5	15	18	14.5	8.5	15	18	14.5	8.5
									22.5	26.5	15	6
0.0068	10 (1250V)	13	12	6	15	18	14.5	8.5	15	18	15.5	9.5
	10 (1000V)	13	11	5					22.5	26.5	15	6
	15	18	14.5	8.5								
0.0082	15	18	13.5	7.5	15	18	14.5	8.5	15	18	16	10
									22.5	26.5	15	6

High Voltage Metallized Polypropylene Film Capacitor

Suntan®

B O X - T Y P E

TS09B

(μF)	1000VDC / 1250VDC (600VAC)				1400VDC / 1600VDC (650VAC)				2000VDC (700VAC)			
	P	W	H	T	P	W	H	T	P	W	H	T
0.01	15	18	12	6	15	18	14.5	8.5	15	18	19	11
									22.5	26.5	16.5	7
0.012	15	18	12	6	15	18	14.5	8.5	22.5	26.5	16.5	7
0.015	15	18	12	6	22.5	26.5	16.5	7	22.5	26.5	17	8.5
0.018	15	18	13.5	7.5	22.5	26.5	17	8.5	22.5	26.5	17	8.5
0.022	15	18	13.5	7.5	15	18	19	11	22.5	26.5	19	10
					22.5	26.5	19	10	27.5	31.4	19.5	10.8
0.027	15	18	14.5	8.5	22.5	26	20	11	27.5	31.4	19.5	10.8
	22.5	26.5	15	6								
0.033	15	18	14.5	8.5	22.5	26	21.5	12	22.5	26	21.5	12
	22.5	26.5	15	6								
0.039	15	18	16	10	27.5	31.4	19.5	10.8	27.5	31.5	21.6	13
	22.5	26.5	16.5	7								
0.047	15	18	19	10.8	27.5	31.4	19.5	10.8	27.5	31	25	14
	22.5	26.5	16.5	7								
0.056	22.5	26.5	17	8.5	27.5	31.4	19.5	10.8	--	--	--	--
0.068	22.5	26.5	17	8.5	27.5	31.5	21.6	13	--	--	--	--
0.082	22.5	26.5	19	10	27.5	31.5	21.6	13	--	--	--	--
0.1	22.5	26.5	19	10	27.5	31.5	21.6	13	--	--	--	--
	27.5	31.4	19.5	10.8								
0.12	27.5	31.4	19.5	10.8	--	--	--	--	--	--	--	--
0.15	27.5	31.4	19.5	10.8	--	--	--	--	--	--	--	--
0.18	27.5	31.5	21.6	13	--	--	--	--	--	--	--	--
0.22	27.5	31.5	21.6	13	--	--	--	--	--	--	--	--

Note: Specification are subject to change without notice. For more detail and update, please visit our website.