


# SLIDE SWITCH

Suntan®

TSS-SS-23E05

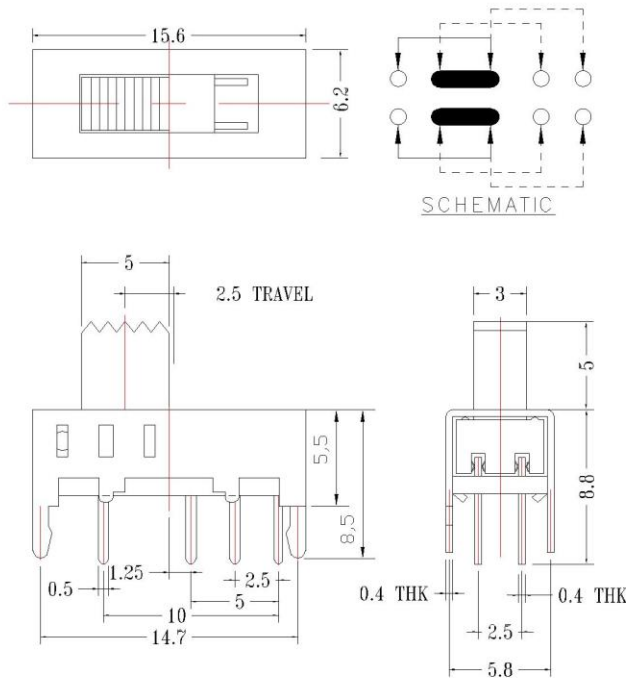

Note: THK means Thickness

MODEL NO	H (mm)
TSS-SS-23E05	5

CODE	OPERATING FORCE(gf)
M	300gf±150gf

No dimensional tolerances specified	
≤1	±0.1
1 ~ 10	±0.2
10 ~ 100	±0.3
>100	±0.5
Angel	±3°

Note: Specification are subject to change without notice. For more detail and update, please visit our website.

## SPECIFICATION:

1. RATING:DC 50V 30mA
2. CONTACT RESISTANCE: 100m MAXΩ.(INITIAL).
3. INSULATION RESISTANCE:100mΩ MIN.AT 250V DC.
4. WITHSTAND VOLTAGE:AC 500V FOR 1 MIN
5. DIP SOLDERING:230±5°C TEMPERATURE,5±1SECOND
6. MANUAL SOLDERING:350±10°C TEMPERATURE,3±1SECOND
7. OPERATING FORCE:-20°C to +80 °C
8. SWITCHING LIFE:10,000 CYCLES