

FOR PHOTO FLASH

TS13D CD17

FEATURES


- High Stability
- Compact and light weight



◆ Specifications

I T E M S		P E R F O R M A N C E		C H A R A C T E R I S T I C S	
Operating Temperature Range(°C)	-20~+55				
Rated Voltage	330WV.DC			360WV.DC	
Voltage Proof	350SV.DC			390SV.DC	
Capacitance Tolerance(20°C, 120Hz)	-10%~+20%				
Dissipation Factor(20°C, 120Hz)	Capacitance: 150~600 μ F	Less than 0.1			
	:700~1500 μ F	Less than 0.15			
Leakage Current	I=1xC (20°C, after 5 minutes) Max				
	I: Leakage Current (μ A)	C: Rated Capacitance (μ F)			

◆ Dimensions

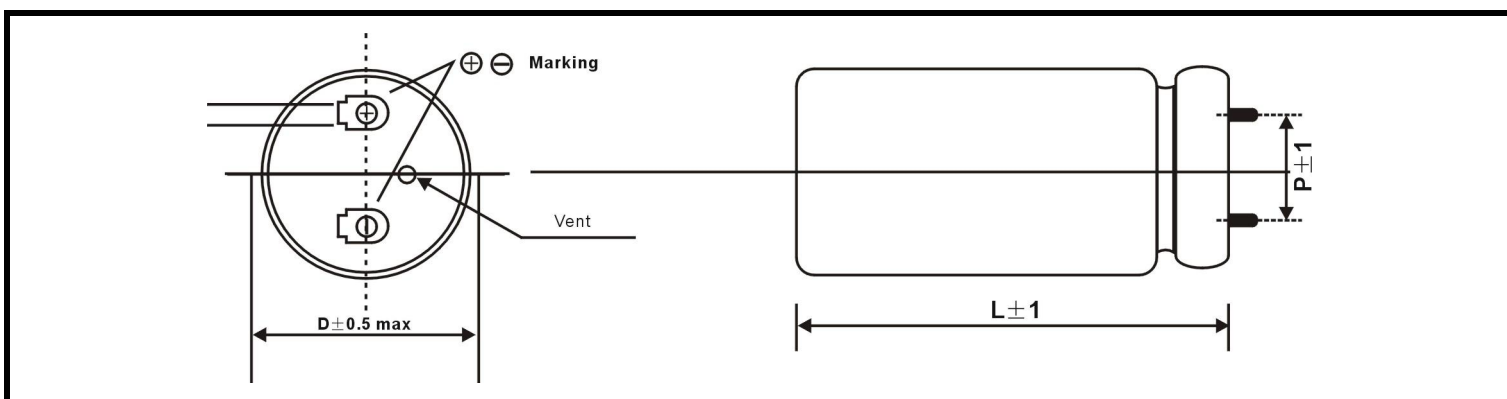

◆ Standard ratings

330WV.DC(350SV.DC)

Capacitance (μ F)	Φ D(mm)	20	22	25	30	35
	P	8	10	10	10	10
150	L (mm)	25	--	--	--	--
180		30	25	--	--	--
200		35	30	25	--	--
250		40	30	30	--	--
300		45	35	30	25	--
350		50	40	35	25	--
400		--	45	40	30	25
450		--	50	45	30	25
500		--	--	50	35	25
600		--	--	55	35	30
700		--	--	--	40	30
800		--	--	--	45	35
900		--	--	--	45	35
1000		--	--	--	50	40
1200		--	--	--	60	45
1300	--	--	--	--	45	
1500	--	--	--	--	50	

360WV.DC(390SV.DC)

Capacitance (μ F)	Φ D(mm)	20	22	25	30	35
	P	8	10	10	10	10
150	L (mm)	30	25	--	--	--
180		35	30	25	--	--
200		35	30	30	--	--
250		40	35	30	25	--
300		50	40	35	30	--
350		--	45	40	30	25
400		--	50	45	35	25
450		--	--	50	35	30
500		--	--	60	40	30
600		--	--	--	40	35
700		--	--	--	45	35
800		--	--	--	50	40
900		--	--	--	60	40
1000		--	--	--	60	45
1200		--	--	--	--	50
1300	--	--	--	--	55	
1500	--	--	--	--	60	

Note: Specification are subject to change without notice. For more detail and update, please visit our website.