

NON – INDUCTIVE, EPOXY DIP COATED, HIGH MOISTURE RESISTANCE


FEATURES

TS07

- Highly reliable because of its excellent Self-Healing performance.
- Dissipation Factor is normally low and it is stable against high frequency and change of temperature.
- Recommended for high-frequency circuits like s-curve compensating circuit.

SPECIFICATIONS

OPERATING TEMPERATURE	-40°C TO + 85°C
RATED VOLTAGE	DC 100V, 250V, 400V, 630V
CAPACITANCE RANGE	0.01 TO 8.2Mfd
CAPACITANCE TOLERANCE	±5%, ±10%, ±20%
INSULATION RESISTANCE	$U_R > 100V \quad C \leq 0.33\mu F \quad IR \geq 25000M\Omega$ $C > 0.33\mu F \quad IR \geq 7500s$ $U_R < 100V \quad C \leq 0.33\mu F \quad IR \geq 12500M\Omega$ $C > 0.33\mu F \quad IR \geq 3750s$
DISSIPATION FACTOR	≤0.002 (AT 1KHz) (Typical 0.001 max)

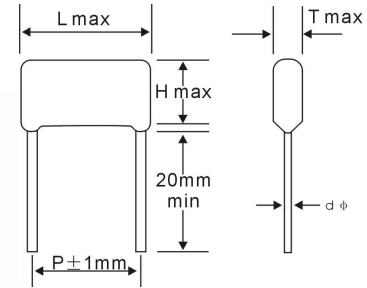

VDC Mfd	100 VDC (2A)					250 VDC (2E)				
	L	T	H	d	P	L	T	H	d	P
0.01	13	5.5	9	0.6	10	13	5.5	9	0.6	10
	10	5	8	0.6	7.5	10	5	8	0.6	7.5
0.012-0.015	13	6	10	0.6	10	13	6	10	0.6	10
	10.5	5	8	0.6	7.5	10.5	5	8	0.6	7.5
0.022-0.027	13	6	9	0.6	10	13	6	9	0.6	10
	10.5	6	10	0.6	7.5	10.5	6	10	0.6	7.5
						18	6	11	0.6	15
0.033-0.036	13	6	10	0.6	10	13	6	10	0.6	10
	10.5	6.5	10	0.6	7.5	10.5	6.5	10	0.6	7.5
0.039-0.047	13	7	11	0.6	10	13	7	11	0.6	10
	10.5	6	10	0.6	7.5	10.5	6	10	0.6	7.5
0.056	10.5	6	10	0.6	7.5	13	6	10	0.6	10
0.068	13	6	10	0.6	10	13	6	10	0.6	10
0.1	13	7	11	0.6	10	13	7	11	0.6	10
	10.5	5.5	9	0.6	7.5	10.5	5.5	9	0.6	7.5
0.15	13	9	13	0.6	10	13	9	13	0.6	10
	10.5	6.5	11.5	0.6	7.5	10.5	6.5	11.5	0.6	7.5
0.22	13	6	11	0.6	10	13	6	11	0.6	10
	10.5	6	11	0.6	7.5	18	7.5	11.5	0.8	15
	18	6	10.5	0.6	15					
0.33	18	6	11	0.6	15	18	9	14	0.8	15
0.47	18	9	14	0.8	15	18	10.5	15	0.8	15
						23	8.5	15	0.8	20
0.68	23	6.5	13	0.8	20	23	8	15.5	0.8	20
1.0	23	8	14.5	0.8	20	23	10	16.5	0.8	20
	18	7.5	12.5	0.6	15	25	11.5	18	0.8	22.5
1.2	23	8.5	15	0.8	20	23	11	18	0.8	20
	18	8.5	13.5	0.6	15	25	12	19	0.8	22.5
1.5	18	8.5	15	0.8	15	25	12	17.5	0.8	22.5
	23	7	14	0.8	20	23	12	18.5	0.8	20
	31	10	19	0.8	27.5	31	10	19	0.8	27.5
2.2	23	8.5	15	0.8	20	25	14	21	0.8	22.5
	31	12	21	0.8	27.5	31	12	21	0.8	27.5
3.3	23	11	17	0.8	20	31	15	24	0.8	27.5
	31	15	24	0.8	27.5					

MEALLIZED POLYPROPYLENE FILM CAPACITOR - MPP

Suntan®

NON – INDUCTIVE, EPOXY DIP COATED, HIGH MOISTURE RESISTANCE

TS07

VDC Mfd	400 VDC (2G)					630 VDC (2J)				
	L	T	H	d	P	L	T	H	d	P
0.01	13	5.5	9	0.6	10	13	5.5	9	0.6	10
	10	5	8	0.6	7.5					
0.012-0.015	10.5	5	8	0.6	7.5	13	6	10	0.6	10
	13	6	10	0.6	10					
0.018-0.022	13	7	11	0.6	10	13	7	11	0.6	10
						18	5.5	9.5	0.6	15
0.033-0.036	13	6.5	10	0.6	10	13	6.5	10	0.6	10
	18	6.5	11.5	0.6	15	18	6.5	11.5	0.6	15
0.039	13	6	11	0.6	10	18	6.5	12	0.6	15
0.047	13	6.5	11.5	0.6	10	13	6.5	11.5	0.6	10
	18	7.5	12	0.6	15	17	7.5	12	0.6	15
0.068	13	6	10.5	0.6	10	13	8	13	0.6	10
	18	6	9.5	0.6	15	17	8.5	13.5	0.6	15
0.1	13	7	12	0.6	10	18	6.5	11	0.6	15
	18	6.5	11	0.6	15					
0.15	19	7.5	13	0.8	15	19	7.5	13	0.8	15
0.22	18	9	14.5	0.8	15	18	9	14.5	0.8	15
0.33-0.39	18	9	16	0.5	15	25	8.5	15	0.8	22.5
	23	7.5	14.5	0.8	20					
0.47	23	8	15	0.8	20	23	8	15	0.8	20
	25	9.5	16	0.8	22.5	25	9.5	16	0.8	22.5
0.56	23	9	15.5	0.8	20	25	10.5	17	0.8	22.5
	18	11	17.5	0.6	15	31	11	18	0.8	27.5
0.68	25	10.5	18	0.8	22.5	23	11.5	18	0.8	20
	23	11.5	18	0.8	20	31	11	18.5	0.8	27.5
	23	8	14	0.8	20					
0.82	25	10.5	17	0.8	22.5					
1.0	25	11.5	18	0.8	22.5	25	13	21	0.8	22.5
	23	10	16	0.8	20	31	13	22	0.8	27.5
	31	10	18	0.8	27.5					
1.5	23	12	20	0.8	20	31	16.5	25	0.8	27.5
	23	9	17	0.8	20					
	31	12	20	0.8	27.5					
2	25	13	21	0.8	22.5					
	23	10	16	0.8	20					
	31	14.5	22.5	0.8	27.5					
2.2	25	14	22	0.8	22.5					
	23	11	19	0.8	20					
	31	15	23	0.8	27.5					
3.3	23	14	22	0.8	20					
	31	18	26.5	0.8	27.5					

Note: Specification are subject to change without notice. For more detail and update, please visit our website.