

US2A THRU US2M

SURFACE MOUNT HIGH EFFICIENCY RECTIFIER

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 2.0 Ampere

FEATURES



- ◆ Plastic package has UL flammability Classification 94V-0
- ◆ Glass Passivated chip junction
- ◆ Built-in strain relief
- ◆ Fast switching speed for high efficiency
- ◆ High temperature soldering :

250°C/10 seconds

Mechanical Data

- ◆ Case: JEDED DO-214AA transfer molded plastic
- ◆ Terminals: Solder plated, Solderable per MIL-STD-750, Method 2026
- ◆ Polarity: Color band denotes cathode end

DO-214AC (SMA)

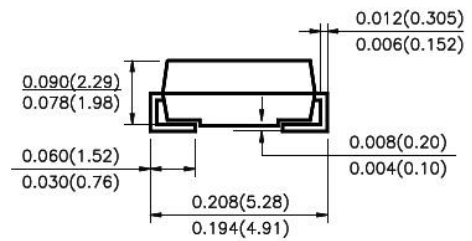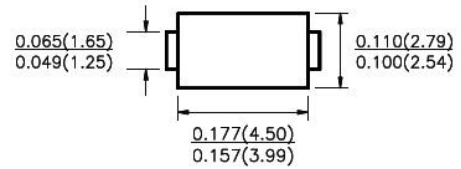

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

PARAMETER	SYMBOL	US2A	US2B	US2D	US2G	US2J	US2K	US2M	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	VOLTS
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	VOLTS
Maximum Average Forward Rectified Current At $T_L = 90^\circ\text{C}$ (NOTE 1)	$I_{(AV)}$	2.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							Amps
Maximum instantaneous forward voltage at 2.0A	V_F	1.0		1.3		1.7		VOLTS	
Maximum DC Reverse Current at Rated DC blocking voltage	I_R	$T_A = 25^\circ\text{C}$							uA
		$T_A = 125^\circ\text{C}$							
Maximum Reverse Recovery Time Test conditions $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$	t_{rr}	50			75			ns	
Typical Junction Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)	C_J	50			30			pF	
Typical Thermal Resistance (NOTE 1)	$R_{\theta JA}$	50							°C/W
	$R_{\theta JL}$	17							
Operating Junction Temperature	T_J	-55 to +150							°C
Storage Temperature Rang	T_{STG}	-55 to +150							°C

Note: Thermal resistance from Junction to ambient and from junction to lead mounted on P.C.B. with $0.2 \times 0.2''$ ($5.0 \times 5.0\text{mm}$) copper pad areas.

US2A THRU US2M

SURFACE MOUNT HIGH EFFICIENCY RECTIFIER

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 2.0 Ampere

RATING AND CHARACTERISTIC CURVES US2A THRU US2M

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

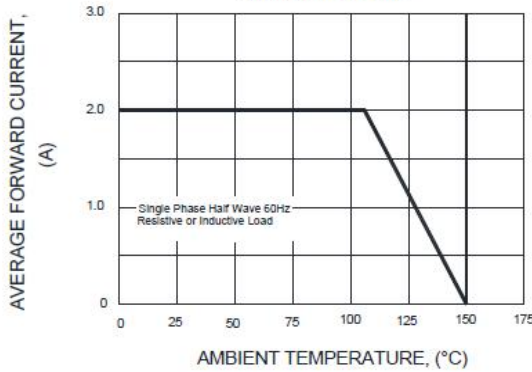


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

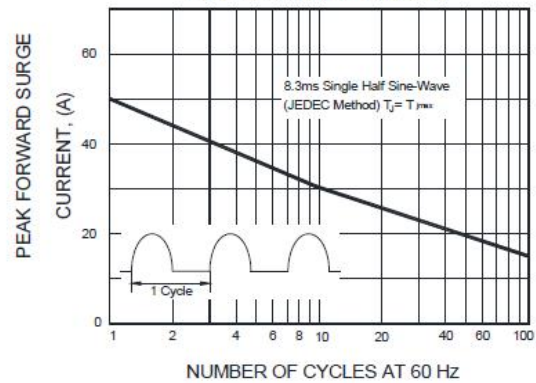


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

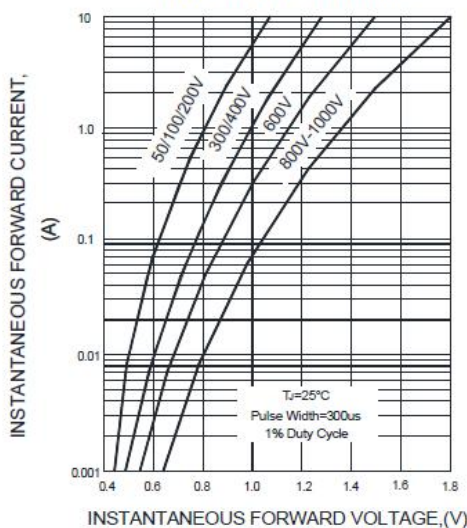


FIG.4-TYPICAL REVERSE CHARACTERISTICS

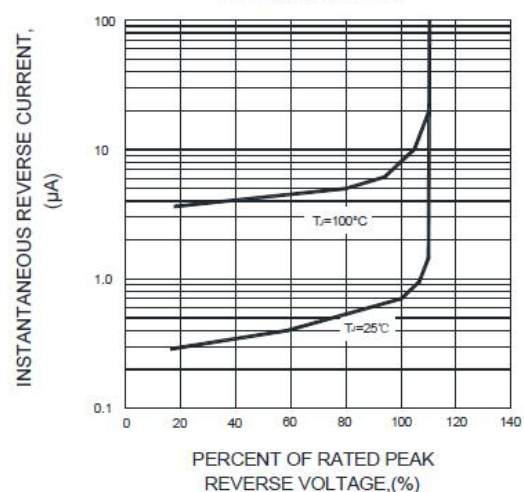


FIG.5-TYPICAL JUNCTION CAPACITANCE


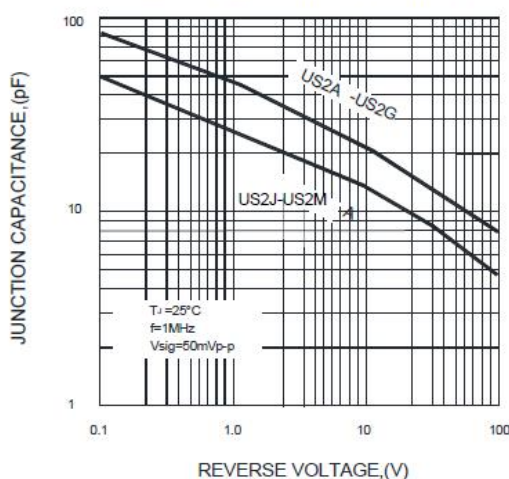


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

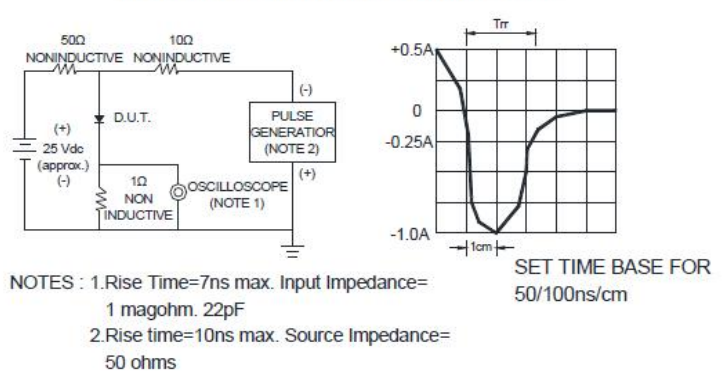

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.