

MB1S THRU MB10S

SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE: 100 to 1000 Volts FORWARD CURRENT: 0.8 Ampere


FEATURES

- ◆ Rating to 1000V PRV
- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- ◆ Lead tin plated copper

Mechanical Data

- ◆ Polarity: Symbol molded on body
- ◆ Mounting position: Any

MBS

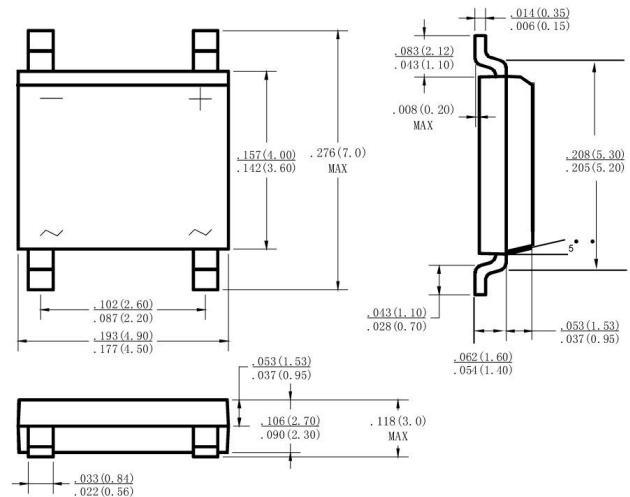

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOLS	MB1S	MB2S	MB4S	MB6S	MB8S	MB10S	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current (Note 1) @ $T_A=40^\circ C$	$I_{(AV)}$	0.8						A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I_{FSM}	30						A
Peak Forward Voltage at 0.8A DC	V_F	1.1						V
Maximum DC Reverse Current @ $T_J=25^\circ C$ at Rated DC Blocking Voltage @ $T_J=125^\circ C$	I_R	5.0 500						μA
Typical Junction Capacitance Per Element (Note2)	C_J	15						pF
Typical Thermal Resistance (Note3)	$R_{\theta JL}$	75						$^\circ C/W$
Operating Temperature Range	T_J	-55 to +150						$^\circ C$
Storage Temperature Range	T_{STG}	-55 to +150						$^\circ C$

Note: NOTES: 1.Mounted on P.C. board. 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC. 3. Thermal resistance junction to case

MB1S THRU MB10S

SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIERS
 REVERSE VOLTAGE: 100 to 1000 Volts FORWARD CURRENT: 0.8 Ampere

RATING AND CHARACTERISTIC CURVES MB1S THRU MB10S

FIG.1-FORWARD CURRENT DERATING CURVE

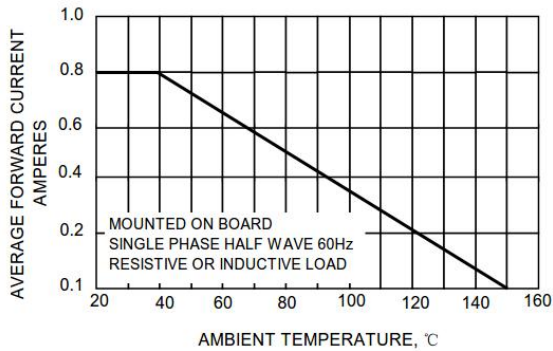


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

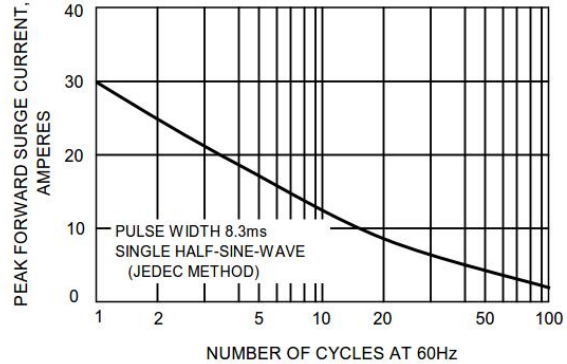


FIG.3-TYPICAL REVERSE CHARACTERISTICS

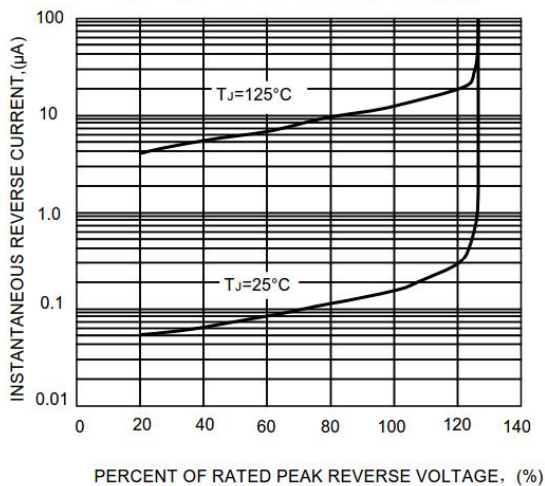


FIG.4-TYPICAL FORWARD CHARACTERISTICS


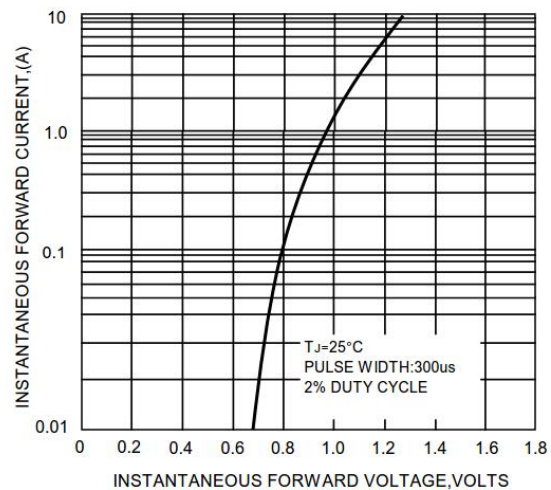


FIG.5-TYPICAL JUNCTION CAPACITANCE

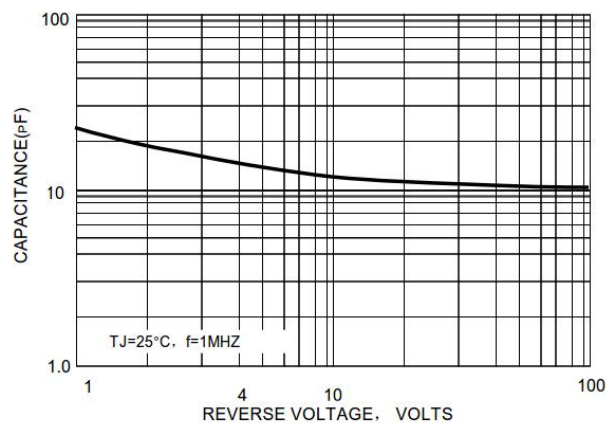

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.