

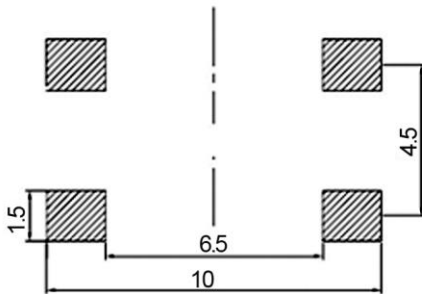




# TACT SWITCH

Suntan®

## TSS-RP-06XG

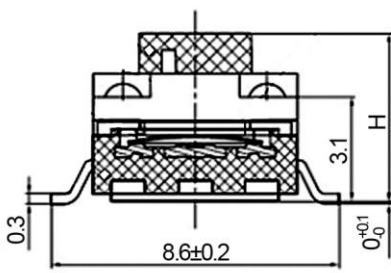

General Tolerance:  $\pm 0.2\text{mm}$

MODEL NO	H (mm)	Tape & Reel Option
TSS-RP-06XG	4.3	Yes
TSS-RP-06XA	5	Yes
TSS-RP-06XB	7	Yes
TSS-RP-06XE	9.5	Yes

CODE	OPERATING FORCE(gf)
Z	250 $\pm$ 100

### SPECIFICATIONS

1. RATING:DC 12V 50mA
2. TRAVEL:0.30 $\pm$ 0.1mm
3. CONTACT RESISTANCE 100m $\Omega$  MAX
4. LIFE: normal 50,000~100,000 times  
(over 100,000 times on request)

Note: Specification are subject to change without notice. For more detail and update, please visit our website.