
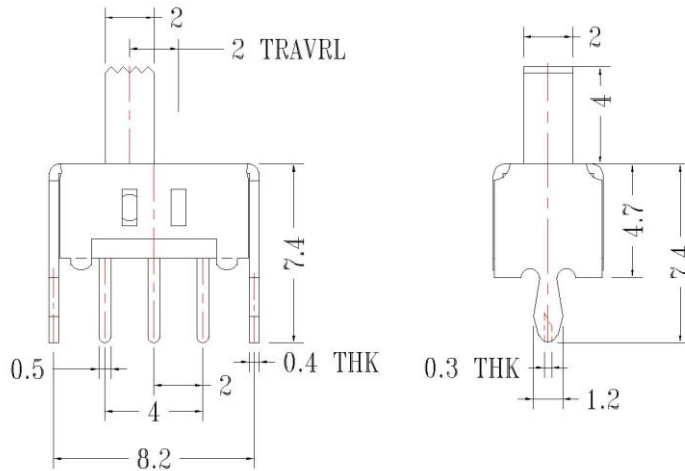



SLIDE SWITCH

Suntan®

TSS-SS-12D02



Note: THK means Thickness

MODEL NO	H (mm)
TSS-SS-12D02	4

CODE	OPERATING FORCE(gf)
Z	250gf ±100gf

No dimensional tolerances specified	
≤1	±0.1
1 ~ 10	±0.2
10 ~ 100	±0.3
>100	±0.5
Angel	±3°

SPECIFICATION:

1. RATING:DC 50V 30mA
2. CONTACT RESISTANCE:100m MAX Ω.(INITIAL).
3. INSULATION RESISTANCE:100mΩ MIN.AT 250V DC.
4. WITHSTAND VOLTAGE:AC 500V FOR 1 MIN
5. DIP SOLDERING: 230±5°C TEMPERATURE,5±1SECOND
6. MANUAL SOLDERING: 350±10°C TEMPERATURE,3±1SECOND
7. OPERATING FORCE:-20 °C to +80 °C
8. SWITCHING LIFE:10,000 CYCLES

Note: Specification are subject to change without notice. For more detail and update, please visit our website.